


Special Note: Below are general guidelines for the installation of sheepskin seat covers. As seats vary so do certain aspects to installation instructions. Please feel free to contact us (800.782.3333) if you require further assistance.

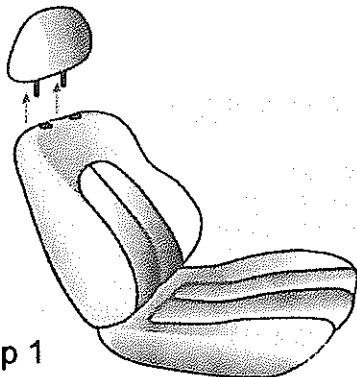


Step 1

Option 1: Lowback seats with removable headrest. If you have an adjustable headrest it will need to be removed. Headrests are removable in several ways. If problems are encountered removing headrest consult your manual, dealer or you may also call us toll free (800.782.3333)


Option 2: Lowback seats with non-removable headrests. The sheepskin seat cover will have a velcro strip, which should be pulled apart and slipped over the headrest.

Option 3: Highback seats with incorporated headrests. If you have a highback seat without a headrest the sheepskin will slip over the whole seat.

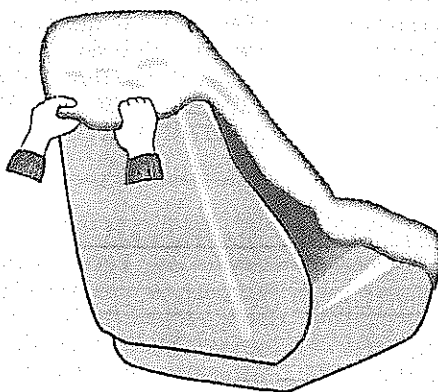


Step 2

Recline the backrest portion of your seat. Place the seat cover on seat, fitting cap (first) over top of seat.

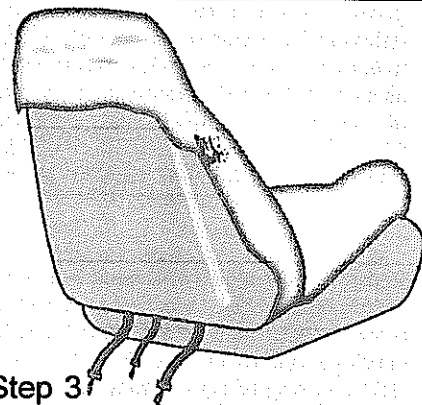


Step 3

Take the three straps in center seam of seat cover and pull (tugging hard) them through the break between seat and backrest. If seat does not allow for center break strap to pull through, cut provided strap off.

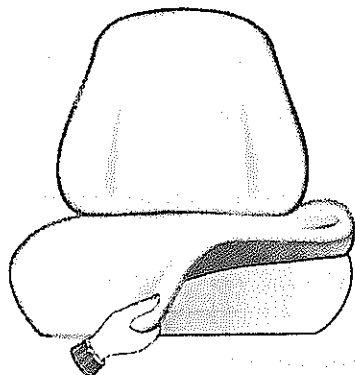


Step 4

Take front corners of seat cover (in sitting position) and turn them inside out and place them on the seat corners. Keeping seam of seat cover lined up with seam of vehicle's seat, turn (fold) cover back to normal by working your way to center of seat from either corner.

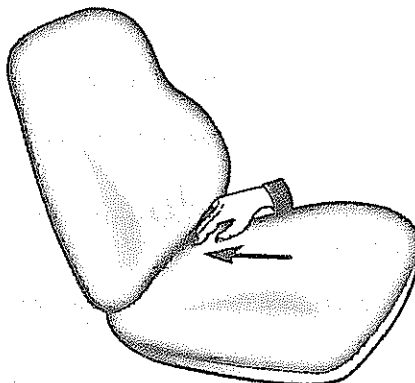

Step 5


Bring backrest upright and tuck in all excess sheepskin into break of seat. (If seat is designed with bottom molding, tuck in excess side skirts of seat cover into plastic seat molding).

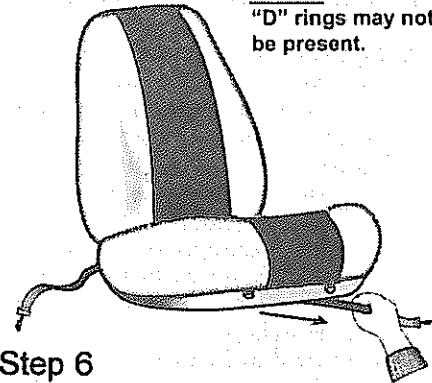

Step 6


Take shorter center strap and attach to any under portion of the seat. Attach metal hooks on long outside straps (one at a time) to hole in white fitting rod provided. Pull rod through under seat to the front.

Inserts
"D" rings may not be present.

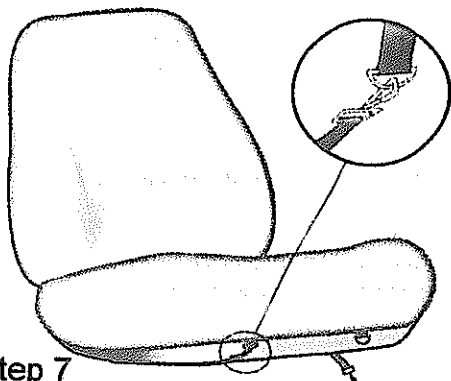


Step 7

Unclip hooks from fitting rod and connect to "D rings" located on the front of the seat cover. May not be used if "D rings" not present.

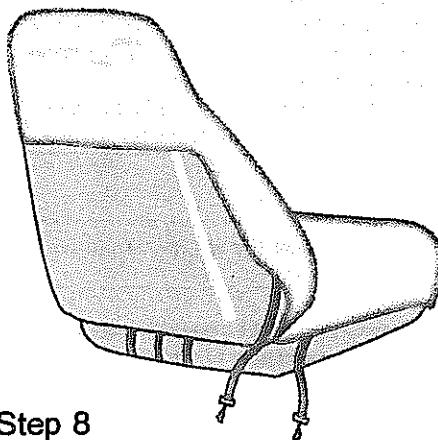

Step 8

Take remaining straps found on side panels of upper half and lower half of cover and fasten to any attachment under seat.

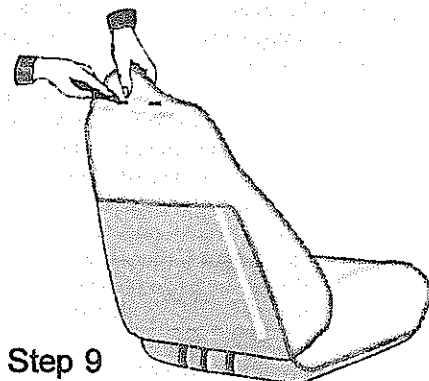

Step 9

For Lowback Seats Only (seats with an adjustable headrest) You should now have a snug fit and be ready to replace headrests. After locating position of headrest shafts, use a sharp instrument to pierce cover cutting a small slit. Insert headrest poles through cover and into the headrest shafts.

BLUE RIBBON SHEEPSKIN CORPORATION
8055 CLAIREMONT MESA BLVD
SAN DIEGO, CALIFORNIA 92111 (858)-569-8511
AMERICAS NO. 1 MANUFACTURER OF GENUINE SHEEPSKIN COVERS SINCE 1979

INSTALLATION INSTRUCTIONS

!Seat covers that are altered to accommodate for side air bag deployment will have a cut out on the left side of the cover for the driver seat and a cut out on the right side of the cover for the passenger seat. Please note this when installing your covers. Blue Ribbon's Five star tailor-made sheepskin seat covers are designed to allow free deployment of side impact airbags when correctly installed on those vehicles having such airbags built into their seats. All other seat covers must not be installed over side impact airbags as this could interfere with their deployment. Purchaser and/ or User accepts full responsibility and liability for installation of such seat covers on seats containing airbags. **DO NOT ROTATE/ALTERNATE THESE COVERS. THEY HAVE BEEN SPECIFICALLY ALTERED SO THAT DRIVER WILL ONLY FIT ON DRIVER AND PASSENGER WILL ONLY FIT ON PASSENGER. DO NOT REMOVE THIS LABEL.**

CLEANING INSTRUCTIONS

Remove small stains with spot remover. **DRY CLEAN** only when necessary. Your seat covers, being made with natural sheepskin, should be allowed to breathe. Freshness is maintained by leaving your car windows slightly open whenever possible. By lightly brushing with a wire or other hard brush your covers will remain full and fluffy. Sprinkling with corn meal or baking soda, brushing and vacuuming from time to time removes loose dust and dirt. Should your seat covers become wet, tumble dry on a **NO HEAT** setting or lay out to dry **OUT OF DIRECT SUNLIGHT**. Vacuum covers regularly. If seat covers (driver and passenger) are identical, rotate every year.

24 MONTH LIMITED WARRANTY

Your sheepskin covers are guaranteed against defective materials (broken straps, loose stitching, broken clips or rings and torn leather) and workmanship for a period of 2 years from date of purchase. **NOTE:** Covers are manufactured from natural sheepskin which has been dyed and some color fade will occur. Such fade should be expected and does not constitute a defective material within the meaning of this warranty. **WARNING:** Due to the possible bleeding of the darker colored dyes used in the sheepskin, it is highly recommended to use the darker colored seat covers (black, brown, navy, burgundy and midnight gray on dark seats **ONLY**).

Q: My covers don't fit.

- a. Make sure that if there is an air bag cut out that the cover with the cut out for the driver is on the left side and the cover with the cut out for the passenger is on the right side.
- b. Are you placing the top over the top and the bottom over the bottom, or have you put them in upside (reverse) down?

Q: My covers are too short, they "hammock" over the break.

- a. Did you remove the headrest first?
- b. If you do not have a removable headrest, check on the skin side, not fur side, of the cover at the top for Velcro. You have to split the Velcro apart before you can place over the headrest

Q: There are no holes cut for the headrests

- a. You have to align the covers the way you want them and then take an x-acto knife and cut an "X" where you want the headrest posts to go.

Q: There is too much excess skin

- a. Start at the top of the seat and work your way down. If there is excess skin, tuck in between the break, the area at the bottom of the back and the back of the bottom cushion

Q: The covers are too loose

- a. Set the covers the way you want them and then, using the straps, pull as tight as you can before you anchor the straps

Q: I can't get the headrests off

- a. The headrests come off in one of three ways:
- b. If manual, extend the headrests up as far as they can go. Then grab each headrest post and rock back and forth the posts while pulling up firmly. Also, look for buttons or pin holes in the post bases.
- c. If electric, use the motor to extend as far up as possible. Then grab each headrest post and rock back and forth the posts while pulling up firmly. To replace, put each headrest post back in the opening and press firmly down until you hear a click or feel a snap, which indicates the posts have been engaged into the mechanism.
- d. Using visual alignment, there is a button located approximately 10-12 inches down from the top of the outside headrest post and under the present seat covering. Feeling with your finger, once the button is located, depress firmly the button while raising the headrest.
- e. **NOTE:** MBZ model years 1999 and older, see #d.

Q: There is no cut out for the armrest

- a. Check on the skin side, not fur side, of the cover where the armrest would be for Velcro. You have to split the Velcro apart before you can place the armrest through the cover.

Q: There are no "D" rings as indicated on the installation sheet

- a. If your seats have a plastic frame covering the seat, there will be no "D" ring. There will be a white pouch with a rubber connector inside the pouch. Simply align the covers as you want, depress the rubber inside the pouch and place firmly and as far down as possible between the seat and the plastic frame.